

CSG series

Switch guards for switch series 5000M - 600H

New!

Specifications

UG1410A



- Modern, patented design
- Lightweight
- Anti-tamper wire seal hole as standard

SPECIFICATIONS

- APEM SAS patented design
- Operating temperature : -20°C to +55°C
- Storage temperature : -40°C to +85°C

MATERIALS

- Support plate : thermoplastic
- Cap : thermoplastic

Switch guards are designed to prevent accidental lever operation on switches with $\varnothing 11,9 (.468)$ or $\varnothing 12 (.472)$ threaded bushing and lever length 17,5 (.688) outside bushing.


When the guard is raised, the lever can be operated freely.

When the guard is fully depressed, the lever is locked in a stable position.

Please note that these guards are not intended to reset the actuator in the desired position.


Note : For correct switch operation, the switch guard should be adjusted properly (see "Mounting" on last page)

DIMENSIONS

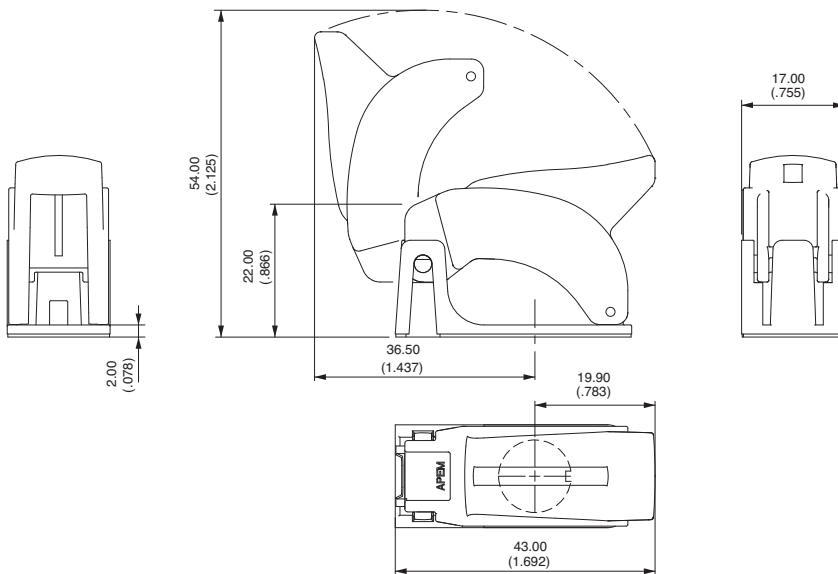

Note : $\varnothing 1,60$ mm holes for wiring a seal are standard on all models.

The company reserves the right to change specifications without notice.

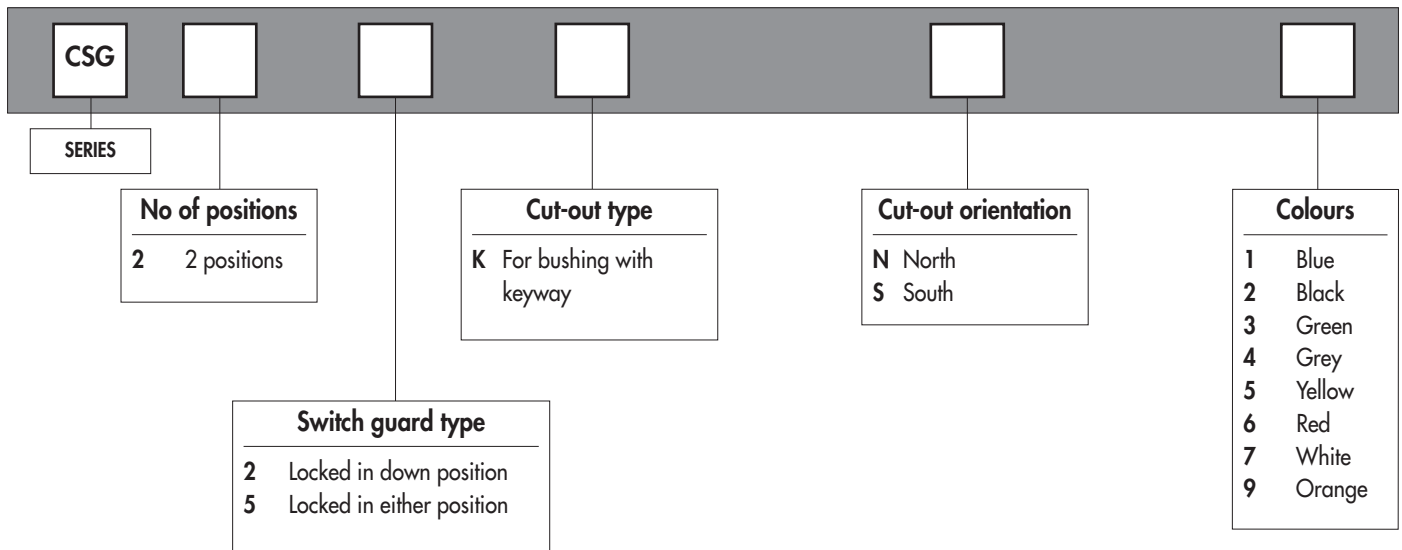

Dimensions : first dimensions are in mm while inches are shown as bracketed numbers.



NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.



Mounting accessories : supplied with the switch or to order separately (see "Hardware" at the end of the section)




Packaging unit : 40 pieces

CSG series


Switch guards for switch series 5000M - 600H

New!



NUMBER OF POSITIONS




2 2 positions



SWITCH GUARD TYPE




Locked in down position






Locked in either position

CUT-OUT TYPE




For bushing with keyway

CUT-OUT ORIENTATION




New!

COLOURS



1 : blue - 2 : black - 3 : green - 4 : grey - 5 : yellow - 6 : red - 7 : white - 8 : black - 9 : orange

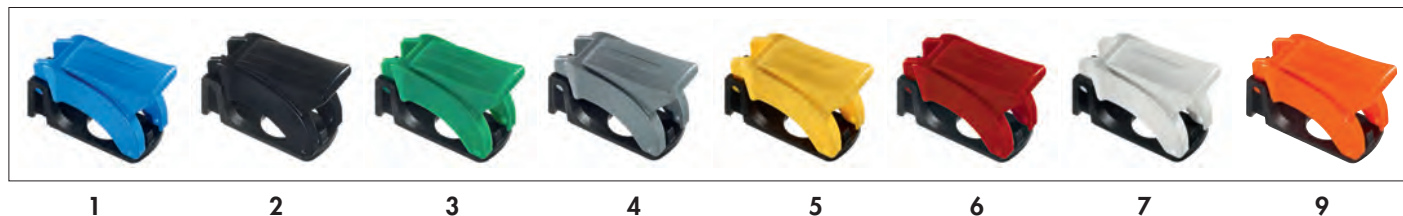

MOUNTING



Standard



With K sealing option